

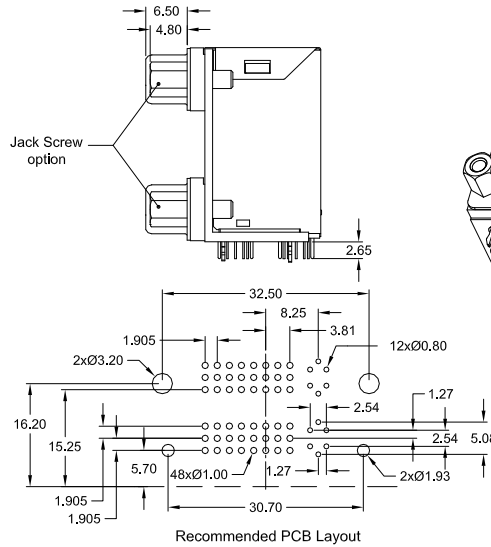


**Analog & Digital Type fully shielded**

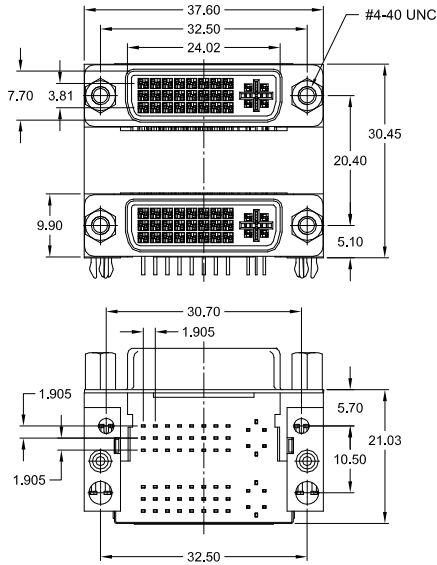

**Specifications**

<b>Electrical:</b>	
Current rating	1.5 A min. per Contact
Insulator resistance	1000 M Ω min.
Contact resistance (upper/lower)	30 / 20 m Ω max.
Dielectric strength	1000 V for 1 Min.
Withstanding voltage	500V (rms) AC 1 Min.
Operating temperature	-55° C to +85° C
<b>Mechanical:</b>	
Insertion force (total)	4.5 Kg max.
Withdrawal force (total)	1.0 Kg min.
Durability	100 Cycles
<b>Material:</b>	
Contact	Copper Alloy
Insulator	PBT UL 94V-0
Shell	SPCC Ni plated
Shield	Stainless Steel

**How to order**




**DVD - 2929 - NAD9 - xx /W S X**

Plating
<b>95</b> = Tin ( <i>leadfree</i> ) / Gold flash
On request:
<b>97</b> = Tin ( <i>leadfree</i> ) / Gold 15μ"
<b>98</b> = Tin ( <i>leadfree</i> ) / Gold 30μ"

Housing Color
<b>W</b> = white (standard)
<b>B</b> = black (option)

Option
<b>J</b>
4 Jack Screws 4-40 UNC

**Digital Type fully shielded**

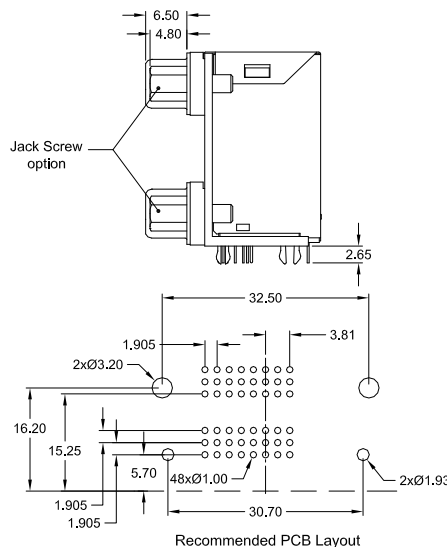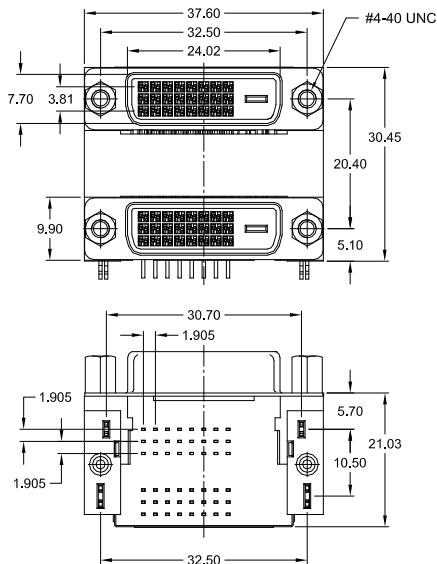

**Specifications**

<b>Electrical:</b>	
Current rating	1.5 A min. per Contact
Insulator resistance	1000 M Ω min.
Contact resistance (upper/lower)	30 / 20 m Ω max.
Dielectric strength	1000 V for 1 Min.
Withstanding voltage	500V (rms) AC 1 Min.
Operating temperature	-55° C to +85° C
<b>Mechanical:</b>	
Insertion force (total)	4.5 Kg max.
Withdrawal force (total)	1.0 Kg min.
Durability	100 Cycles
<b>Material:</b>	
Contact	Copper Alloy
Insulator	PBT UL 94V-0
Shell	SPCC Ni plated
Shield	Stainless Steel

**How to order**

**DVD - 2424 - NDD9 - xx /W S X**

Plating
<b>95</b> = Tin ( <i>leadfree</i> ) / Gold flash
On request:
<b>97</b> = Tin ( <i>leadfree</i> ) / Gold 15μ"
<b>98</b> = Tin ( <i>leadfree</i> ) / Gold 30μ"

Housing Color
<b>W</b> = white (standard)
<b>B</b> = black (option)

Option
<b>J</b>
4 Jack Screws 4-40 UNC